


ROOF AUGERS

FEATURES

- 6" (152 mm) or 8" (254 mm) 12 ga. (2.7 mm) Corrosion Resistant tubular housing
- Electric Motor Mount Belt Drive
- Intermediate Flight Bearings on 10" Models
- 90° Discharge Spout
- Clamp-on or Band-on Hopper Choice
- Three Roof Mounting Brackets

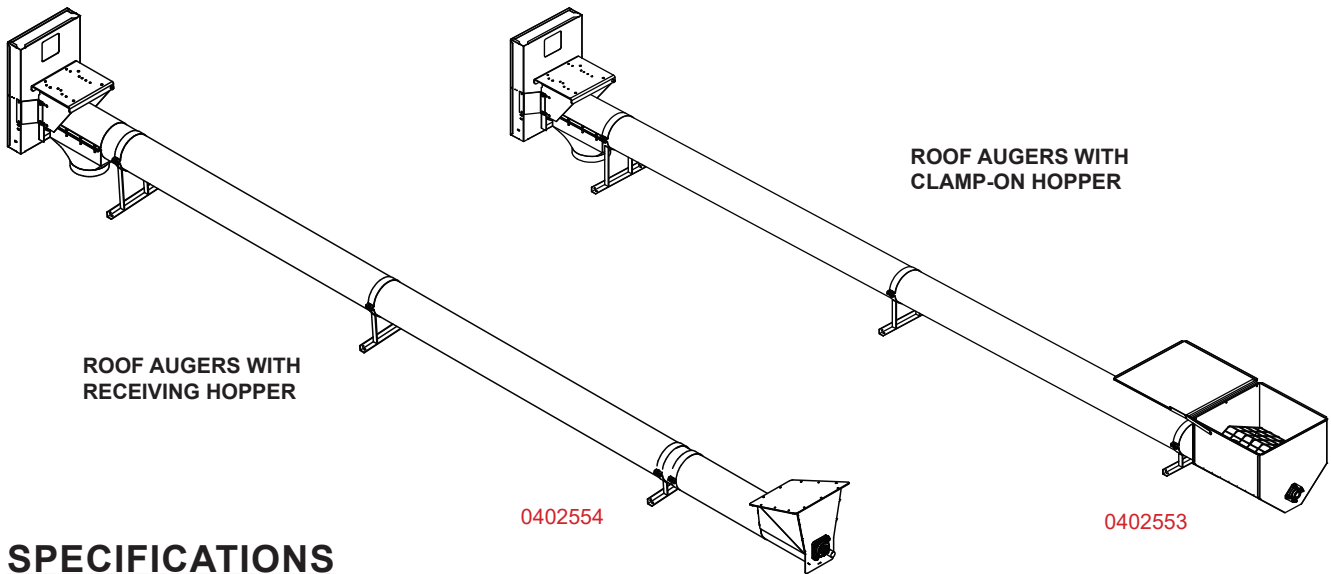

SPECIFICATIONS

MODEL	AUGER HOUSING	FLIGHT	MOTOR PULLEY	AUGER PULLEY	ELECTRIC POWER	CAPACITY
6" X 11'	12 ga.	11 ga.	3.1" P.D.	11.5" P.D.	1 HP	1,500 BPH
	(2.7 mm)	(3 mm)	(79 mm)	(292 mm)	(.75 kw)	(38 MTPH)
6" X 16'	12 ga.	11 ga.	3.1" P.D.	11.5" P.D.	1 1/2 HP	1,500 BPH
	(2.7 mm)	(3 mm)	(79 mm)	(292 mm)	(1.1 kw)	(38 MTPH)
6" X 21'	12 ga.	11 ga.	3.1" P.D.	11.5" P.D.	2 HP	1,500 BPH
	(2.7 mm)	(3 mm)	(79 mm)	(292 mm)	(1.5 kw)	(38 MTPH)
8" X 11'	12 ga.	7 ga.	2.6" P.D.	11.5" P.D.	1 1/2 HP	2,500 BPH
	(2.7 mm)	(4.5 mm)	(66 mm)	(292 mm)	(1.1 kw)	(64 MTPH)
8" X 16'	12 ga.	7 ga.	2.6" P.D.	11.5" P.D.	2 HP	2,500 BPH
	(2.7 mm)	(4.5 mm)	(66 mm)	(292 mm)	(1.5 kw)	(64 MTPH)
8" X 21'	12 ga.	7 ga.	2.6" P.D.	11.5" P.D.	3 HP	2,500 BPH
	(2.7 mm)	(4.5 mm)	(66 mm)	(292 mm)	(2.2 kw)	(64 MTPH)
10" X 11'	12 ga.	1/4"	3.1" P.D.	14.5" P.D.	3 HP	3,600 BPH
	(2.7 mm)	(6 mm)	(79 mm)	(368 mm)	(2.2 kw)	(92 MTPH)
10" X 16'	12 ga.	1/4"	3.1" P.D.	14.5" P.D.	5 HP	3,600 BPH
	(2.7 mm)	(6 mm)	(79 mm)	(368 mm)	(4 kw)	(92 MTPH)
10" X 21'	12 ga.	1/4"	3.1" P.D.	14.5" P.D.	7-1/2 HP	3,600 BPH
	(2.7 mm)	(6 mm)	(79 mm)	(368 mm)	(5.5 kw)	(92 MTPH)
10" X 27'	12 ga.	1/4"	3.1" P.D.	14.5" P.D.	7-1/2 HP	3,600 BPH
	(2.7 mm)	(6 mm)	(79 mm)	(368 mm)	(5.5 kw)	(92 MTPH)